

Volkswagen Golf MK7

MDI - Assembly Instructions V.1.0.



The bundle includes:

1 pc.	harness
1 pc.	iPod/iPhone/USB adapter

1

Start the installation process by dismantling the radio, which is located in the passenger glove box. Insert the keys, which unlock the locks into the holes in order to unplug the connection blocks.



2

Extract the radio and dismantle the glove box by pressing two handles, which hold the latter in place.

A



B



3

We remove the screw (you can see it on the picture below) and remove the cover by folding it back.



4

A

After we remove the cover we put the wires in a way shown on the picture.



B

The wires that end with the 8E0972416A and 4E0035750F plugs should be pulled through to the place where 5G003522A set is installed.



C


The socket, which is a part of the bundle, should be installed as indicated on the drawing, after the 8E0972416A and 4E0035750F plugs are connected.




5

The second part of the harness should be pulled to the glove-box.
The green 8X0035447A plug should be inserted into the quadlock (as indicated on the drawing)

A

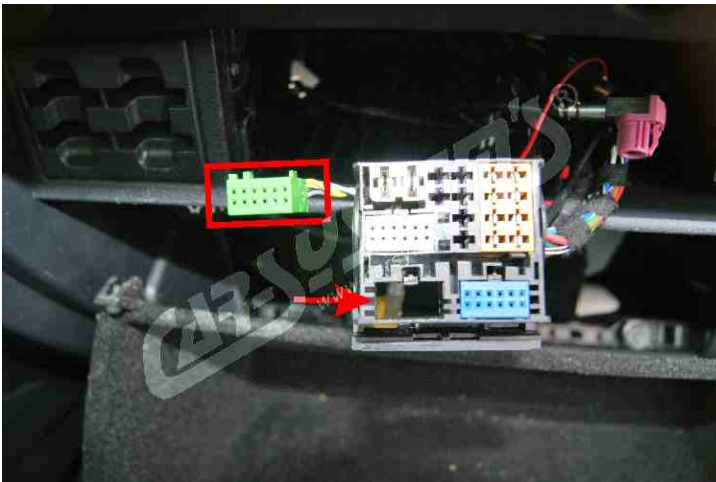

B

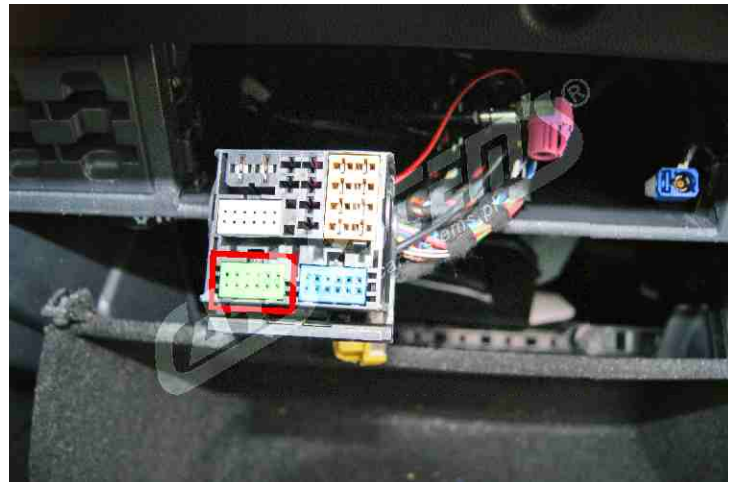

6

The second part of the harness - the green.



7

CODING

Via the means of VCDS diagnostic system:

Open the "5F" Block --> Select Coding
--> next, look for the Coding Guide section -->
look for the Byte 8 and mark bit 5.